

MP9815E PA System Emergency Panel



Features


- 1 minutes digital REC / PLAY IC
- Record Level control
- Output volume control
- Friendly control panel, easy for use
- Alarm triggering and siren or recorded signal output

Specification

Inputs	Mic: 2 mV, 10 kΩ ; Line: 0 dBV, 10 kΩ ; Alarm: 0V / +24V (or open), 0 V (short circuit) is valid .
Output	SIREN or Recorded Message: 0 dBV
Rec.	IC inside, 60 s.
Frequency response	100 Hz--10 kHz
Protection	AC fuse ×1
Power Requirement	AC 220 -240 V / 50~60 Hz
Dimensions	485×88×365 mm
Gross weight	6.5 kg
Net weight	5.2 kg

Specifications are subject to be changed without notice.

FRONT PANEL

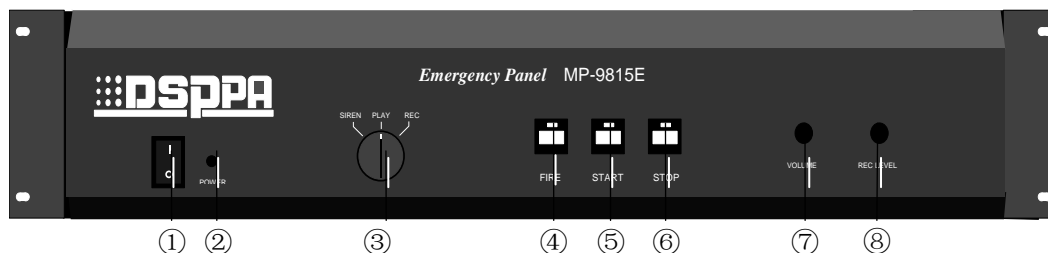

- | | |
|--|---|
| <p>① Power switch</p> <p>② Power indicator</p> <p>③ OPTION
 SIREN : siren signal output.
 PLAY : recorded signal output.
 REC : record into IC inside.</p> | <p>④ FIRE : manual siren.</p> <p>⑤ START : start recording or playing.</p> <p>⑥ STOP : stop recording or playing.</p> <p>⑦ Output level control.</p> <p>⑧ REC level control.</p> |
|--|---|

REAR PANEL & CONNECTIONS

