

DSP9130

30W Round Electric Flip Speaker



Description

DSP9130 round electric flip speaker is a 30W motorized speaker with the features of automatic flip and adjustable angle. Equipped with coaxial unit and 28 turbo worm DC gear motor with overload and over-circuit protection, it is durable for use, safe and sturdy, which is ideal for background music systems, home theatre, multi-function conference hall, small conference room and so on.

Features



- Rated Power: 30W;
- Freq. Resp. Range: 80~20kHz;
- Sensitivity(1m, 1W): 88dB ± 2dB;
- Max. SPL (1m): 102dB ± 2dB;
- 28 Turbo Worm DC Gear Motor with overload and over-circuit protection;
- The speaker can be automatically flipped, and when there is music, it will automatically flip to the set angle, so that the sound field of the speaker can be changed, so that the listener can get the best effect.
- With 5.25-inch coaxial unit, equipped with the coaxial unit, clear sound level, mellow, transparent, strong bass;
- Beautiful appearance design, high-quality plastic injection-molded shell and high- quality iron mesh, the product is sturdy and durable.

Specifications

Model	DSP9130
Speaker Unit	5.25" × 1"
Impedance	8Ω
Rated Power(RMS)	30W
Peak Power	80W
Freq. Resp. Range	80~20kHz
Sensitivity(1m,1W)	88dB±2dB

Max.SPL(1m)	102dB±2dB
Product Size (L×W×H)	φ242×160mm
Net Weight	1.9kg

Product Information

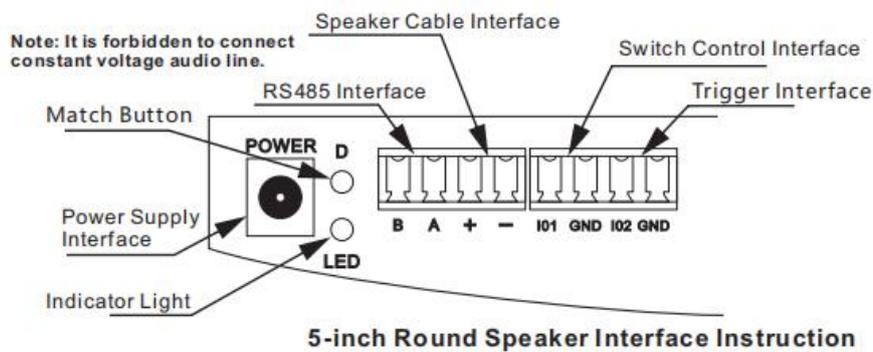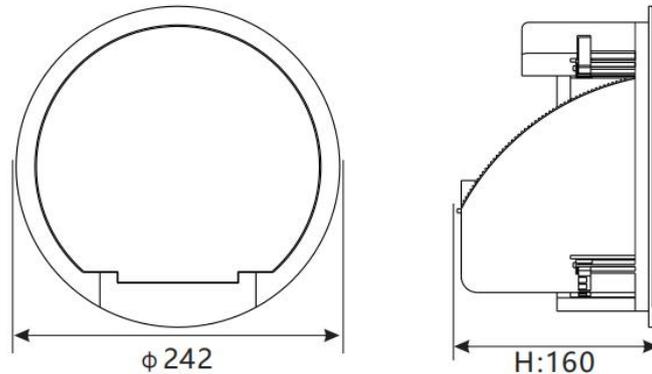

Installation Method

① Cut a speaker mounting hole in accordance with the hole dimension drawing, reinforce it with wood board. After removing the decorative panel of the electric flip speaker, put the speaker into the hole. (see Figure 1)

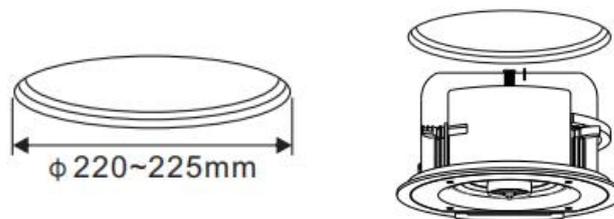


Figure 1

② Hold the product by hand to tighten the mounting screws, fix the product on the ceiling, and then suck the mesh surface on the speaker to complete the installation and check whether it is firm. (See Figure 2)

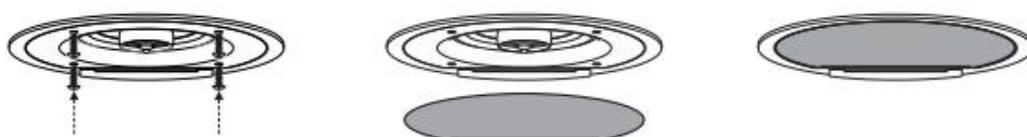


Figure 2